




COT M4200 K-WOM Thermal printer for mobile application

- ▶ Direct thermal printer with 104 mm print width
- ▶ 8 dots/mm (203 DPI)
- ▶ Up to 152 mm/s print speed
- ▶ Robust metal case designed for industrial use
- ▶ Solid roll holder with brake and guidance discs on both sides
- ▶ Easy paper change due to quick acting locks at print station as well as roll holder
- ▶ Large paper supply volume with 160 mm roll diameter
- ▶ Operation with 24V DC voltage for mobile applications
- ▶ Protected interface connector area
- ▶ COT IAS multifunctional controller with:
 - V24 and ethernet interface, KonfigSaver, various data protocols and emulations
 - RPO Remote Printer Observer port for network-based printer status monitoring
 - HTTP- Server for status monitoring and configuration

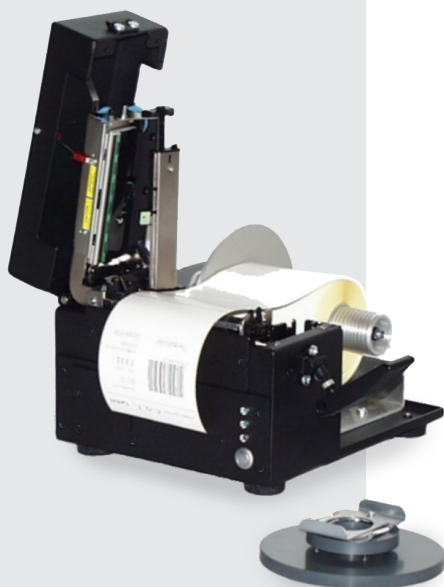

Geöffnet für Papierwechsel

The M4200 from COT is the most suitable printer for applications in rough industrial environments. Due to its design and operation with 24V DC voltage it is highly convenient especially for a mobile application on forklifts or on COT's mobile workstation.

Technical Specifications

Mistakes reserved

Typ	COT M4200 K-WOM	
Technology	Direct thermal printing	
Resolution	203 dpi, 8 Punkte/mm	
Print speed (max)	152 mm/s	
Emulations	COT CFP (IGP), Datamax; ZPL, Markpoint	
Protocols	Pros, SAP, K-WOM incl. RPO-Status, SAP with zCOT Support, external entry (f.e. FTP) are User and Passwort protected	
Fonts	COT CFP (IGP) 10/12/15/17/20 CPI, 1 skalierbarer Font	Datamax 1 skalierbar TrueType Download, 8 Bitmap 203x203 DPI (PCX-Format)
Graphics (Logos)	60x72 DPI, 203x203 DPI (PCX-Format)	
Barcodes	Code 39, Code 128, EAN8, EAN13, Interleaved 2/5, EAN/UCC 128, etc.	Zus.: MaxiCode, PDF417, Telepen, etc.
Media types	roll media; continuous or with perforation, adhesive labels, fanfold	
Media sensing	Label gap, notch or reflective black mark	
Media sensor	adjustable	
Media width (min. – max.)	19 - 118 mm	
Media roll diameter (max.)	160	
Media thickness	0,0635-0,254 mm (0,0025-0,01")	
Print width (max.)	104 mm	
Print length (max.)	812 mm	
Label length (min.)	25,4 mm	
Interfaces	Standard: IAS-Ethernet with KonfigSaver, RS232C, WLAN	
Dimensions (W x D x H)	approx. 275 x 305 x 190 mm (160 mm roll, closed)	
Weight (without paper roll)	approx. 5,9 kg	
Supply voltage	24V	
Power consumption (approx.)	Stand-by: 0.3 A Printing: max. 19.5 A peak	
Optional	Thermal transfer printing with the COT M4200TT, 300 dpi, 12 dots / mm Collecting tray for fanfold paper / labels	

Printers, Labels and ribbons – from one source

For our printer systems we produce all kinds of labels – paper, carton and foil – blank or preprinted, according to your individual requirements.

In addition we can provide thermal transfer ribbons (carbon ribbons) of all sizes and in different qualities, matching your specific label types.