



# sepioo D12.2 NB-IoT indoor



## Technical Details

Dimensions	264.8 x219.9 x15.0 mm 10.43x8.66 x0.59 inch	Additional sensors	Accelerometer, Temperature, GPS, BLE
Display technology	Full graphic E-ink display	Encryption	128-bit AESwith secure key exchange
Active display area	236.9 x189.4 mm 9.33 x7.46 inch	Compliance	CE, ROHS, FCC/IC
Resolution	768 x960 px	Packaging unit	5 labels/ box
Pixel density	103dpi	Data throughput	CatNB1Half-duplex; Up to 27.2kb/s Downlink, 62.5kb/s Uplink
Pixel colors	Black/white	Operating frequency	Connectivity module for multi-regional use of Cat-NB & LTE Cat-M1
Protection glass	Yes	LED	Yes
Usable pages	8	Wireless firmware update	Yes
Casing color	Anthracite	Buttons	4
Operating temperature	+10°C to +45°C/ +50 °F to 113°F	Waterproof	IP65
Storage temperature	-10 °C to +45°C/ +14°F to 113°F		
Best for batteries:	+15°C to +35°C/ 59 °F to +95 °F		
Battery	Pouch 5200 mAh 19.24Wh		
Battery lifetime	Rechargeable		

## Technical Drawing

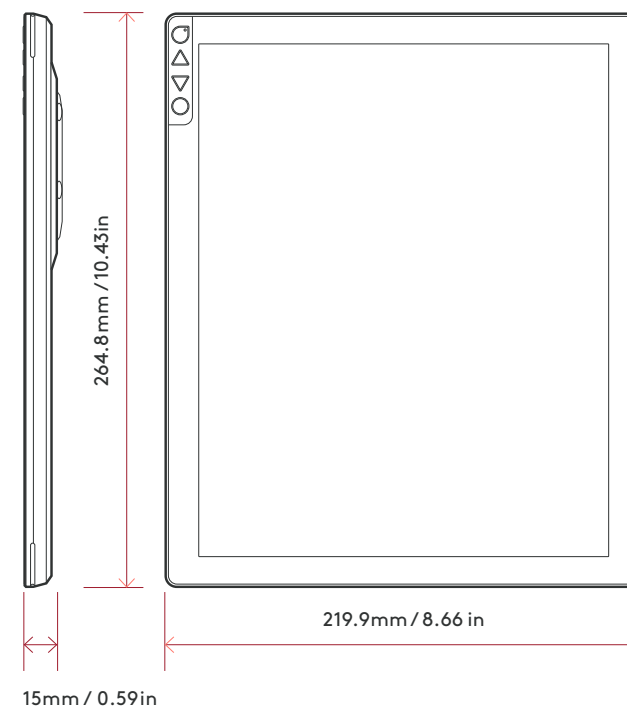



**COMPUTER OEM  
TRADING GMBH**  
SMART IDENT SOLUTIONS

COT Computer OEM Trading GmbH  
Güterstraße 5  
64807 Dieburg  
[www.cot.de](http://www.cot.de) | [info@cot.de](mailto:info@cot.de)